Asian Journal of
Science, Technology, Engineering, and Art

e-ISSN : 3025-4507
p-ISSN : 3025-5287
Index : Harvard, Boston, Sydney University, Dimensions, Lens, Scilit, Semantic, Google, etc

https://doi.org/10.58578/AJSTEA.v2i6.4109

# WSN Localization in Smart Cities Using Hybrid (TDOA & RSSI) Localization Techniques with Extended Kalman Filter

**Ishiwu Ifeanyichukwu Jude[1], Oshiga Omotayo[2], Tologon Karataev[3], Peter Igba Awunde[4], Nusaiba Bashir Kurfi[5], Michael Paul Okpe[6], Ollor Abee Ejire[7], Odivwofene Excel Ogheneovo[8]**
Nile University of Nigeria, Abuja, Nigeria
Judeclinton30@gmail.com; ooshiga@nileuniversity.edu.ng

**Article Info:**

| Submitted: | Revised: | Accepted: | Published: |
|---|---|---|---|
| Oct 11, 2024 | Oct 27, 2024 | Nov 8, 2024 | Nov 13, 2024 |

**Abstract**

In the context of smart cities, localization technologies are essential for tracking objects in both indoor and outdoor environments. The characteristics of urban settings such as building density, signal interference, and multipath propagation significantly impact the accuracy of localization algorithms. This paper reviews existing localization techniques, categorizing them into range-based and range-free methods, and discusses key algorithms including trilateration, multilateration, and triangulation. We propose a hybrid localization framework that combines Time Difference of Arrival (TDOA) and Received Signal Strength Indicator (RSSI) techniques, enhanced by an Extended Kalman Filter (EKF) for improved accuracy and robustness. Additionally, we present a design architecture for a transmitter and receiver system utilizing Long Range (LoRa) technology, facilitating the development of low-cost, low-power tracking devices that operate independently of Global Positioning System (GPS). Our approach aims to enhance the efficacy of localization in smart city applications, ultimately contributing to improved urban management and safety.


AJSTEA Journal is licensed under a Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International License

**Keywords:** Wireless Sensor Networks (WSNs), Localization, Smart Cities, Time Difference of Arrival (TDOA), Received Signal Strength Indicator (RSSI), Extended Kalman Filter (EKF)

## Introduction

As urbanization continues to rise, smart cities are increasingly leveraging technology to enhance urban living, promote safety, and improve resource management. Central to these advancements is the ability to accurately track and localize objects within the urban landscape, including children, pets, vehicles, and various assets. Localization technologies are vital for applications such as smart transportation, public safety, and asset management (Yin et al., 2021). Localization techniques can be broadly categorized into range-based and range-free methods. Range-based techniques, such as Time Difference of Arrival (TDOA) and Received Signal Strength Indicator (RSSI), rely on measurable physical parameters to estimate distances between nodes. In contrast, range-free methods do not require precise distance measurements and often use relative positioning among nodes (Dohler et al., 2020). The choice of localization method significantly impacts the accuracy and reliability of the system, particularly in complex urban environments where signal propagation is affected by buildings and other obstacles (Huang et al., 2019).

TDOA is a popular method for localization, particularly in scenarios where high accuracy is required. It involves measuring the time difference of a signal reaching multiple receivers to triangulate the position of a target node. This technique benefits from the synchronization of clocks between the receivers, which can be challenging in practical implementations (Li et al., 2020). Conversely, RSSI is a more accessible method that estimates distance based on the strength of received signals. While easier to implement, RSSI can be affected by various factors such as multipath fading and interference, leading to reduced accuracy (Guan et al., 2022). To enhance the performance of localization algorithms, hybrid approaches that combine multiple techniques have been proposed. Such methods can leverage the strengths of both TDOA and RSSI to improve overall localization accuracy (Zhang et al., 2021). Furthermore, integrating advanced filtering techniques, such as the Extended Kalman Filter (EKF), can provide better state estimation by adapting to dynamic changes in the environment (Simon, 2006).

This paper proposes a hybrid localization framework for wireless sensor networks (WSNs) in smart cities, utilizing TDOA and RSSI techniques enhanced by an EKF. The research also introduces a design architecture using Long Range (LoRa) technology for low-cost, low-power tracking devices that function independently of Global Positioning System (GPS) capabilities. By optimizing the localization process through this hybrid approach, the study aims to contribute to improved urban management, safety, and quality of life in smart cities.

## Literature Review

Localization technologies are critical in the context of smart cities, where tracking objects such as vehicles, pets, and personal belongings enhances safety and urban management. These techniques can be broadly classified into range-based and range-free methods.

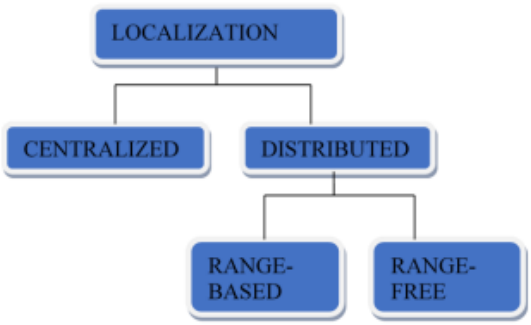



**Figure 1: Classification of Localization Techniques**

## Range-Based Methods

Range-based techniques rely on measurable physical parameters to estimate distances between nodes. Two prominent examples are Time Difference of Arrival (TDOA) and Received Signal Strength Indicator (RSSI). TDOA measures the time it takes for a signal to reach multiple receivers, enabling the triangulation of a target's position. This method is particularly effective in environments requiring high accuracy. However, its implementation poses challenges, particularly in synchronizing clocks between receivers, which can complicate practical applications (Li et al., 2020).

In contrast, RSSI estimates distances based on the strength of received signals. This approach is more accessible and simpler to implement than TDOA; however, it is sensitive to environmental factors such as multipath fading and interference, which can lead to reduced accuracy (Guan et al., 2022). Despite these limitations, RSSI remains a popular

choice for many indoor localization applications due to its cost-effectiveness and ease of integration into existing systems.

**Range-Free Methods**

Range-free methods do not rely on precise distance measurements, making them useful in scenarios where such measurements are impractical. Techniques such as centroid-based localization and proximity methods leverage the relative positioning of nodes to estimate locations. These methods are advantageous in environments where GPS signals may be obstructed or unavailable, though they typically offer lower accuracy compared to range-based techniques (Dohler et al., 2020).

**Hybrid Localization Approaches**

Recent studies have increasingly focused on hybrid localization approaches that combine the strengths of both TDOA and RSSI. These methods aim to mitigate the individual weaknesses of each technique while enhancing overall accuracy. For instance, Zhang et al. (2021) proposed a hybrid system that integrates TDOA and RSSI measurements to improve localization accuracy in urban environments. Their results demonstrated that the hybrid approach outperformed traditional methods, particularly in scenarios characterized by high signal interference.

Hybrid systems benefit from the robustness of TDOA in dynamic environments while utilizing the simplicity of RSSI for quick estimations. The integration of these methods has led to significant improvements in localization performance, making them particularly suitable for smart city applications where conditions can vary widely.

**Filtering Techniques in Localization**

The application of advanced filtering techniques is another key area of research in localization. The Extended Kalman Filter (EKF) is frequently used for state estimation in dynamic systems. EKF enhances localization accuracy by adapting to changes in the environment, which is crucial for maintaining performance in urban settings (Simon, 2006). Studies have shown that using EKF in conjunction with TDOA and RSSI significantly improves position estimates, particularly in scenarios with fluctuating signal strengths and environmental conditions.

For example, EKF has been effectively utilized in various localization systems, showing its capability to filter out noise and provide reliable estimates in real-time (Wang et al., 2020).

The adaptability of EKF makes it an essential component in hybrid localization frameworks, enabling more accurate tracking of objects in complex urban landscapes.

**Challenges in Urban Environments**

Urban environments present unique challenges for localization systems, primarily due to factors such as building density, signal interference, and multipath propagation. Huang et al. (2019) examined the impact of these factors on localization accuracy, revealing that traditional methods often struggle in densely populated areas. The presence of physical obstructions can distort signal propagation, leading to significant errors in position estimates.

To address these challenges, researchers have explored various mitigation strategies. For instance, adaptive algorithms that adjust to changing environmental conditions have been proposed to enhance the reliability of localization systems. These adaptive approaches are particularly vital in smart city applications, where dynamic conditions are the norm.

**Recent Advances and Technologies**

Advancements in communication technologies, such as Long Range (LoRa) networks, have opened new avenues for localization systems. LoRa offers low-power, long-range communication capabilities, making it suitable for widespread deployment in urban environments. The integration of LoRa technology into localization frameworks allows for the development of cost-effective tracking devices that operate independently of GPS (Yin et al., 2021).

Furthermore, optimization algorithms like Particle Swarm Optimization (PSO) have been employed to enhance the accuracy of localization estimates. PSO is a population-based optimization technique that can efficiently determine the coordinates of target nodes based on distance estimates from multiple sources. Studies have shown that incorporating PSO into hybrid localization frameworks can yield significant improvements in accuracy, particularly in challenging environments (Maqsood et al., 2022)

The literature indicates a clear trend toward hybrid localization approaches that integrate multiple techniques to improve accuracy and robustness in smart city applications. As urban environments continue to evolve, the need for effective localization solutions remains paramount. By leveraging the strengths of TDOA, RSSI, and advanced filtering techniques such as EKF, researchers can develop systems capable of operating reliably in

complex urban landscapes. Future research should focus on further refining these hybrid systems and exploring the integration of emerging technologies to address the challenges posed by urban localization.

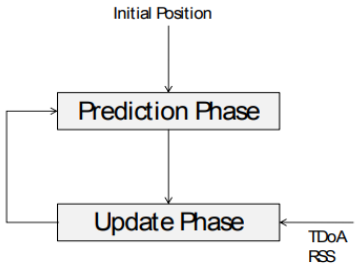



**Figure 2: Extended Kalman Filter**

The Extended Kalman Filter (EKF) is a powerful recursive state estimation algorithm that extends the standard Kalman Filter to accommodate nonlinear systems. It is widely used in various applications, including robotics, navigation, and localization systems, due to its ability to provide real-time position estimates based on noisy sensor measurements.

**Fundamentals of EKF**

The EKF operates by linearizing the nonlinear state transition and measurement equations around the current estimate. The filter maintains an estimate of the state vector and its covariance, updating these estimates as new measurements are received.

- **State Transition and Measurement Model:** The state transition and measurement equations can be represented as:

$$x_k = f(x_k - 1, u_k - 1) + w_k - 1$$

$$z_k = h(x_k) + v_k$$

where $x_k$ is the state vector, $u_k$ is the control input, $w_k$ is the process noise, $z_k$ is the measurement vector, h is the measurement function, and $v_k$ is the measurement noise (Simon, 2006).

**Linearization:** Since f and h are nonlinear, the Jacobian matrices F and H are computed to linearize the equations:

$$F_k = \left.\frac{\partial f}{\partial x}\right|_{x=x_{k-1}}$$

$$H_k = \left.\frac{\partial h}{\partial x}\right|_{x=x_k}$$

**EKF Algorithm Steps**

The EKF algorithm consists of two main phases: prediction and update.

- **Prediction Phase:** In this phase, the filter predicts the current state and the associated uncertainty:

$$\hat{x}_{k|k-1} = f(\hat{x}_{k-1|k-1}, u_{k-1})$$

$$P_{k|k-1} = F_k P_{k-1|k-1} F_k^T + Q$$

where Q is the process noise covariance.

**Update Phase:** After receiving a new measurement, the filter updates its estimates:

$$K_k = P_{k|k-1} H_k^T (H_k P_{k|k-1} H_k^T + R)^{-1}$$

$$\hat{x}_{k|k} = \hat{x}_{k|k-1} + K_k(z_k - h(\hat{x}_{k|k-1}))$$

$$P_{k|k} = (I - K_k H_k) P_{k|k-1}$$

where $K_k$ is the Kalman gain and R is the measurement noise covariance (Grewal & Andrews, 2015).

**Applications of the Extended Kalman Filter (EKF)**

The Extended Kalman Filter (EKF) is particularly useful in localization and tracking applications, especially when the state to be estimated is represented in a nonlinear manner. For example, in the field of mobile robotics, the EKF is often employed to fuse data from multiple sensors, such as GPS and Inertial Measurement Units (IMUs), which helps to improve the accuracy of the robot's estimated position. In the context of smart cities, the EKF can be utilized to track the positions of various objects, including vehicles and pedestrians. It achieves this by continuously updating the estimated locations based on real-time sensor readings. This capability for real-time updates is crucial for numerous applications, such as traffic management, public safety, and asset tracking (Yin et al., 2021).

The EKF offers several benefits. First, it effectively handles nonlinearities, making it applicable to a wide range of practical scenarios. Second, it provides continuous updates to state estimates, which is essential for operating in dynamic environments. However, the EKF also has its limitations. The performance of the EKF is heavily dependent on the

accuracy of the linearization process; significant deviations from the linear approximation can lead to poor estimation results. Additionally, the EKF requires knowledge of the system dynamics and measurement models, which may not always be readily available (Sarkka, 2013).

Extended Kalman Filter is a versatile tool for state estimation in nonlinear systems. It is particularly useful in the context of smart cities for various localization applications. By combining measurements from different sources and continuously refining estimates, the EKF enhances the accuracy and reliability of tracking systems.

**Time Difference of Arrival (TDOA) Measurement Model**

The Time Difference of Arrival (TDOA) measurement model is a prominent technique used for localizing a signal source based on the time at which a signal arrives at multiple receivers. This method is particularly effective in scenarios where precise synchronization of the receivers is challenging.

In a typical TDOA setup, when a signal is transmitted from a source, it travels to several receivers placed at known locations. Each receiver records the time of arrival of the signal. The difference in these arrival times is then used to estimate the position of the source. Mathematically, the time of arrival at each receiver can be expressed as:

$$t_i = \frac{\|s - r_i\|}{c} + t_0$$

where $t_i$ is the time recorded at receiver $r_i$, s is the position of the signal source, c is the speed of the signal, and $t_0$ represents an unknown transmission delay (Li et al., 2020).

To derive the TDOA between a reference receiver and another receiver, the following relationship can be established:

$$\Delta t_{1j} = t_j - t_1 = \frac{\|s - r_j\|}{c} - \frac{\|s - r_1\|}{c}$$

Rearranging this equation gives:

$$\Delta t_{1j} \cdot c = \|s - r_j\| - \|s - r_1\|$$

This formulation indicates that the TDOA can be viewed as a difference in distances between the source and the receivers. Each TDOA measurement effectively creates a hyperbola in the two-dimensional space of the receivers, with the source lying on the hyperbola defined by the difference in distances (Zhang et al., 2021).

In practice, at least three receivers are necessary to accurately determine the position of the source in two-dimensional space, and the inclusion of additional receivers can enhance the robustness and accuracy of the estimation by providing more intersection points for the hyperbolas generated from the TDOA measurements.

However, several challenges are associated with TDOA measurements. One significant issue is the need for accurate time measurements; while absolute synchronization is not required, the relative timing must be precise, as any errors can lead to significant inaccuracies in position estimation. Additionally, environmental factors, such as multipath effects—where signals reflect off surfaces—can distort the time measurements and further complicate localization (Huang et al., 2019). Noise in the environment can also affect the precision of the recorded times, which can compromise the overall accuracy of the TDOA approach.

**Received Signal Strength Indicator (RSSI) Measurement Model**

The Received Signal Strength Indicator (RSSI) measurement model is a widely utilized technique for estimating the distance between a transmitter and a receiver based on the strength of the received signal. This method is particularly beneficial in wireless communications and localization applications, including indoor positioning and asset tracking.

**1.** Fundamentals of RSSI

RSSI measures the power level of the signal received at a certain location, typically expressed in decibels (dBm). The fundamental principle behind RSSI is that the received signal strength decreases as the distance between the transmitter and receiver increases, due to factors such as free space loss, absorption, and scattering. The relationship between signal strength and distance can be modeled using path loss models, which quantify how signal power decreases with distance.

**2.** Mathematical Model

The RSSI measurement can be represented as follows:

Pr = Pt – L(d) + N

Where Pr is the received signal strength

Pt is the transmitted signal power

L(d) is the path loss as a function of distance d

N represents the noise or interference in the channel (Guan et al., 2022)

The path loss L(d) can be estimated using various models, such as the Friis transmission equation or the log-distance path loss model. The log-distance path loss model, for example, is given by:

$$L(d) = L_0 + 10n \log_{10}(d/d_0)$$

where:

- L0 is the path loss at a reference distance d0
- N is the path loss exponent, which varies based on the environment (e.g., urban, suburban, indoor) (Huang et al., 2019).

Distance Estimation Using RSSI

To estimate the distance ddd from the RSSI value, the equation can be rearranged. Assuming a known transmitted power and estimated path loss, the distance can be derived as follows:

$$d = d_0 \cdot 10^{\frac{(P_t - P_r - L_0)}{10n}}$$

This relationship indicates that as the received signal strength decreases (i.e., as PrP_rPr becomes smaller), the estimated distance ddd increases, reflecting the inverse relationship between signal strength and distance.

**Geometric Techniques for Localization**

Geometric techniques play a crucial role in localization methods within wireless sensor networks (WSNs). Three primary geometric techniques are trilateration, multilateration,

and triangulation. Each of these methods utilizes the spatial relationships among known reference points to determine the position of an unknown node.

**1.** Trilateration

Trilateration is a method that calculates the position of an unknown node by obtaining distance measurements from at least three known reference points, commonly referred to as beacons or anchors. Each beacon has a known position and communicates its distance from the unknown node. In the context of Received Signal Strength Indicator (RSSI) measurements, the signal strength is used to estimate the distances to each beacon.

The distances can be conceptualized as radii of circles centered at each beacon's location. The intersection of these circles provides the coordinates of the unknown node. Mathematically, if P1,P2, and P3 are the known positions of the beacons, and d1,d2, and d3 are the corresponding distances, the position Pof the unknown node can be determined by solving the following system of equations:

$$\|P - P_1\| = d_1$$
$$\|P - P_2\| = d_2$$
$$\|P - P_3\| = d_3$$

The solution to these equations yields the estimated coordinates of the unknown node (Zhang et al., 2021).

**2.** Multilateration

Multilateration extends the concept of trilateration by using more than three reference points to calculate the position of the unknown node. This method is particularly useful in environments where TDOA (Time Difference of Arrival) is employed to estimate distances based on the time it takes for signals to reach multiple receivers.

In multilateration, the position of the unknown node is determined by analyzing the time differences of arrival from the signal transmitted to multiple anchors. Each anchor provides a distance measurement, and the intersection of the hyperbolas generated by these distances can be used to localize the node. The added reference points enhance accuracy and robustness, reducing the effects of measurement noise and environmental factors (Dohler et al., 2020).

**3.** Triangulation

Triangulation requires three reference nodes and involves determining the position of an unknown node using angles rather than distances. This method utilizes the Angle of Arrival (AoA) technique, where the unknown node measures the angles to each of the three reference nodes.

Given the angles θ1,θ2, and θ3 from the unknown node to the reference nodes located at P1,P2, and P3 trigonometric relations can be applied to determine the unknown node's position. The geometric relationships are typically expressed as follows:

$$x = d_1 \cos(\theta_1)$$
$$y = d_1 \sin(\theta_1)$$

Here, d1 is the distance from the unknown node to one of the reference nodes, and similar equations apply for the other reference nodes based on their respective angles. By solving these trigonometric equations, the unknown node's position can be accurately computed (Huang et al., 2019). Geometric techniques such as trilateration, multilateration, and triangulation are foundational methods for localizing nodes within wireless sensor networks. Each method leverages the spatial relationships among reference nodes, whether through distances or angles, to determine the position of an unknown node. These techniques are integral to enhancing localization accuracy in various applications, including smart cities and asset tracking.

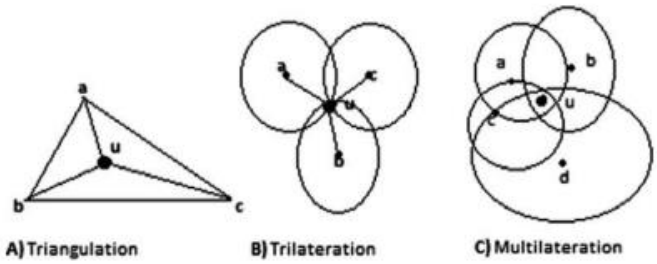



Figure 3: Geometric Techniques


**Methods**


The proposed localization system consists of a network of sensor nodes equipped with **LoRa** technology to achieve long-distance communication and low power consumption. The system includes:

- **Transmitter nodes** that send signals periodically.

- **Receiver nodes** strategically placed to capture signals and measure both RSSI and TDOA values.


Primarily, the proposed system has been divided into two parts. The first part is known as the sender end, where the system interconnects users' mobile phone to an ESP32 module using wireless network. Then the ESP32 module is connected to a LoRa module for transmitting data. The second part is the receiver end where a LoRa module is integrated with the ESP32. In this part, wired connections are made with several sensors and the ESP32 module. The receiver side is interconnected with the home appliances. The architecture of the proposed system is schematically presented in Figure below

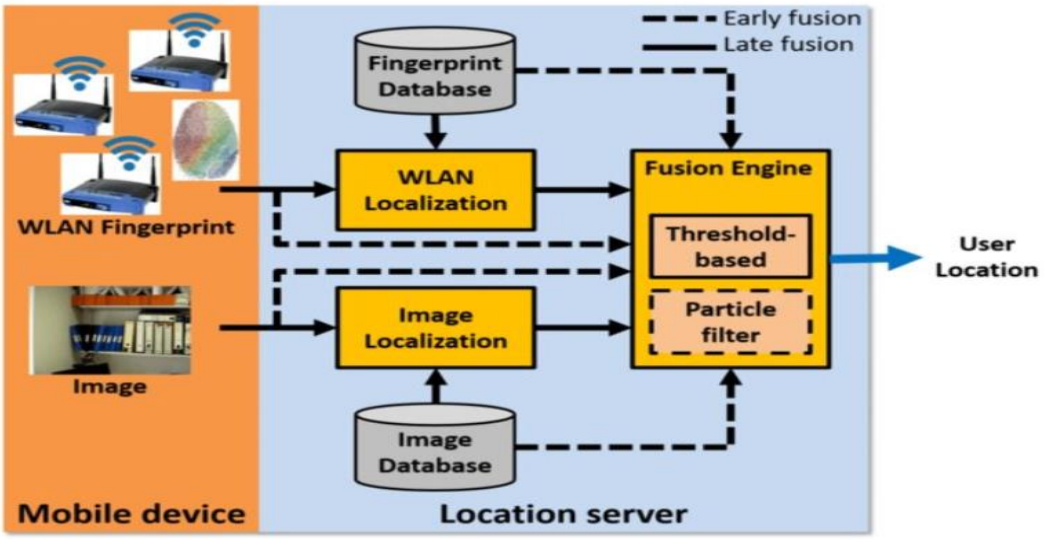

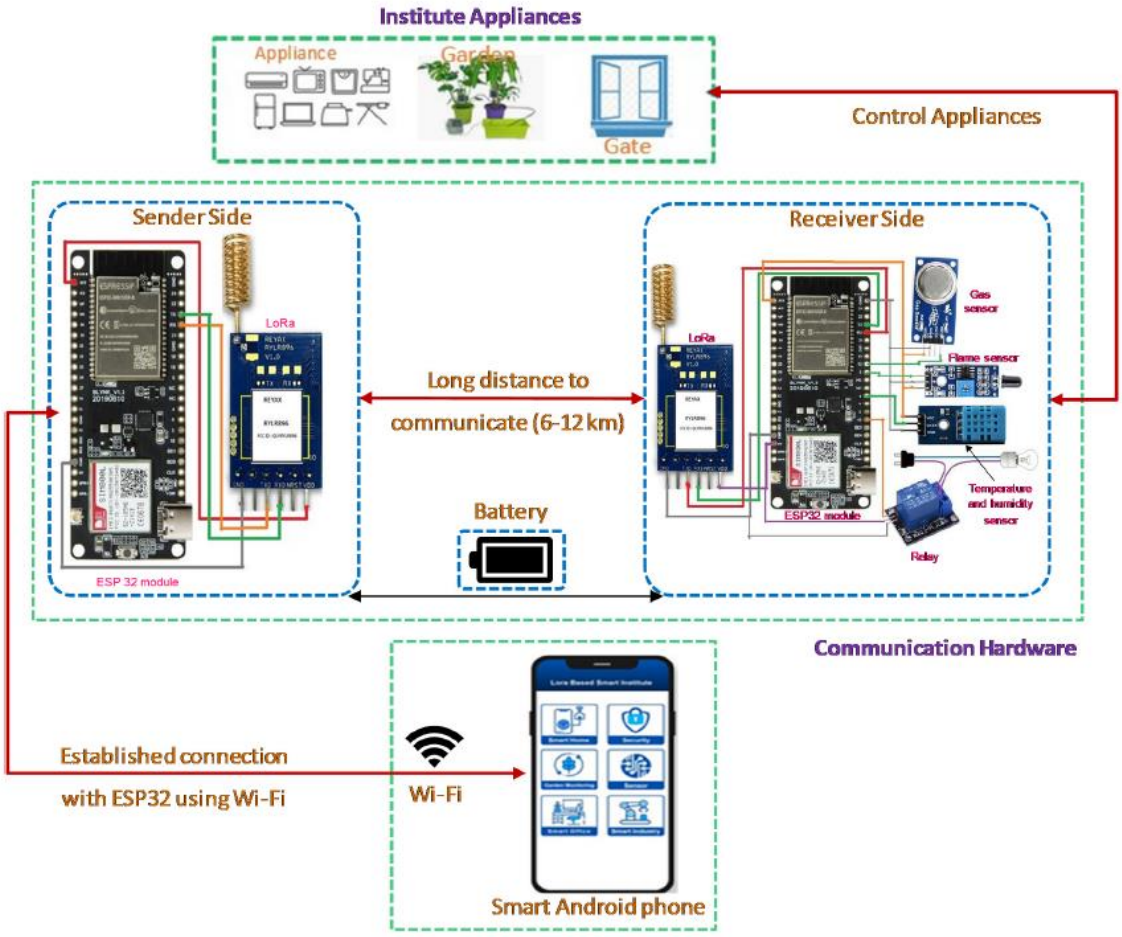


**Working Principle of the Proposed System**

The working principle of the system is presented in the figure above, The system checks the circuitry connections of the associated devices after supplying power to each device. In this system, the LoRa module has served as the data or signal transmitter among the users' devices. The status of all sensors, appliances and other accessories is displayed at the users' mobile application including the sensors' reading data. The status can be changed and displayed immediately when the user toggles the switches between the gadgets. By using such virtual switches, users can control opening and closing of doors and windows, switching of appliances such as light, fan, electric heater, AC, and so on. The proposed system shows the capability to monitor surrounding environment by observing temperature and humidity at the any region where the system is installed. The system can also monitor undesirable objects at muted time frame and notify the user instantly

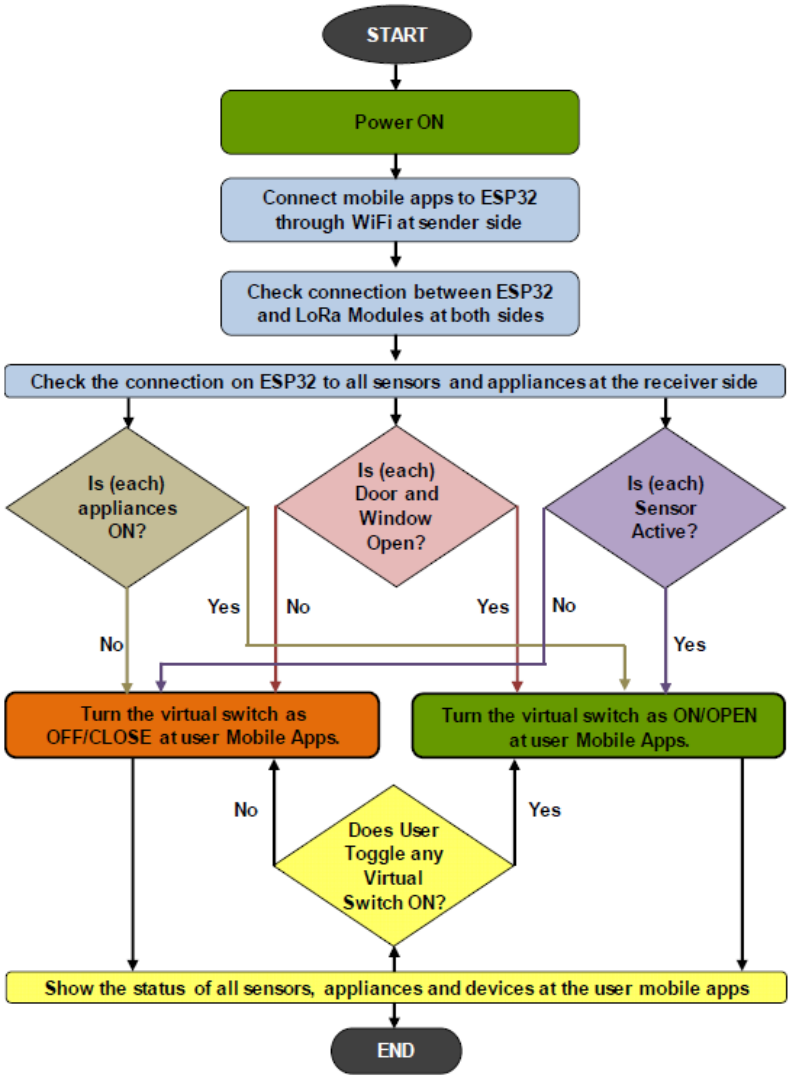


## Hardware Description

The proposed system used RYLR896 as LoRa module, ESP32 microprocessor, sensors, controlling switches and a relay module. The Node MCU ESP32 model of ESP32 microprocessor was used to test the system.

## LoRa Module

The RYLR896 transceiver known as LoRa module provides fanatical long-range spectrum for establishing intercommunication and reliable interference security with low power consumption. This made the automation system more robust. A microcontroller and an antenna were integrated with a Printed Circuit Board (PCB). LoRa has built-in SimTech SX1276 engine and 127 dB dynamic range RSSI that enables controlling different appliances from 3 km to 12 km distance.

## Applications of Localization

The proposed WSN localization system has numerous practical applications in smart city environments. Here are key areas where this technology can be effectively applied:

**1.** Public Safety and Security

**Tracking Vulnerable Individuals**: The system can be used to monitor and locate children, elderly individuals, or people with disabilities within public spaces. This ensures quick response in case someone goes missing or needs assistance.

**Pet Tracking**: Smart city residents often own pets, and this technology allows for efficient tracking and location of pets that may wander away.

**2.** Asset Management

**Public Asset Tracking**: Government and municipal agencies can use this technology to monitor public assets such as utility vehicles, waste management trucks, or service robots. This helps in optimizing resource allocation and ensuring that public services run smoothly.

**Logistics and Fleet Management**: Companies can deploy the hybrid localization system for tracking delivery vehicles and assets in real time, improving supply chain efficiency and minimizing delays.

**3.** Smart Transportation Systems

**Traffic Flow Monitoring**: By integrating with vehicle tracking, this system helps manage traffic congestion by identifying the real-time position of vehicles, which can be used to implement adaptive traffic signal systems.

**Vehicle-to-Infrastructure (V2I) Communication**: The technology can assist in enabling V2I applications by localizing vehicles and communicating their positions to traffic management centers.

**4.** Emergency Response

**Disaster Management**: During natural disasters, tracking and localizing emergency personnel and vehicles ensures a coordinated response and effective deployment of resources.

**Search and Rescue Operations**: The system can be utilized for locating individuals trapped in collapsed structures or remote areas, significantly aiding search and rescue efforts.

**5.** Urban Infrastructure Monitoring

**Structural Health Monitoring**: Sensor nodes equipped with the hybrid localization system can be deployed on bridges, tunnels, and buildings to track positional changes or movements over time, which can indicate structural issues.

**Utility Management**: Water, electricity, and gas utility companies can use WSNs for real-time localization of mobile workforce members or equipment in the field, enhancing response time and service reliability.

**6.** Smart Environment Monitoring

**Pollution Tracking**: WSN localization can support the placement and tracking of sensors that monitor environmental pollution levels across various zones of a city, allowing for timely data collection and response to high pollution areas.

**Wildlife Monitoring in Urban Green Spaces**: Parks and urban reserves can benefit from using this system to track the movement of wildlife, ensuring their safety and monitoring their interaction with the urban environment.

**7.** Retail and Consumer Services

**Indoor Navigation in Malls and Complexes**: The system can provide enhanced indoor positioning services for navigating large shopping centers or airports, leading to improved customer experiences.

**Asset and Inventory Management**: Retailers can use the technology for tracking in-store assets, reducing inventory losses and improving stock management.

**8.** Smart Parking Solutions

**Real-Time Parking Availability**: Localization of vehicles can be integrated into smart parking systems to provide real-time information on parking space availability, optimizing space usage and reducing congestion.

**Vehicle Location Assistance**: Drivers can benefit from being able to quickly locate their vehicles in large parking facilities.

**9.** Research and Urban Development

**Urban Planning**: Data from the WSN localization system can help city planners understand movement patterns within the city, enabling better planning for pedestrian walkways, bike lanes, and public transport routes.

**Smart Building Applications**: The system can facilitate the management of building operations, including security and HVAC system control, by tracking the movement of people and assets within a smart building.

**10.** Smart Home Integration

**Home Automation and Security**: The system can be integrated with smart home devices to monitor the movement of residents or pets within a property, enhancing security and automation capabilities.

These applications illustrate how the hybrid (TDOA & RSSI) localization system, enhanced with an Extended Kalman Filter, plays a pivotal role in supporting the vision of safer, more efficient, and highly connected smart cities.

## Challenges and Recommendation

**1.** Signal Interference and Multipath Effects

**Challenge**: Urban environments are dense with buildings and various structures that cause signal reflection, refraction, and diffraction. This leads to multipath propagation, where signals take multiple paths to reach a receiver, resulting in inaccuracies in RSSI and TDOA measurements.

**Recommendation**: Employ advanced signal processing techniques such as multipath mitigation algorithms and adaptive filtering methods to reduce the impact of multipath effects on localization accuracy.

**2.** Synchronization Issues

**Challenge**: TDOA relies on precise synchronization between sensor nodes to accurately measure time differences. Achieving high synchronization in large-scale WSNs without significant power and resource expenditure is difficult.

**Recommendation**: Utilize synchronization protocols designed for low-power networks, such as the IEEE 1588 Precision Time Protocol (PTP), and integrate time-stamping mechanisms at the hardware level to improve synchronization accuracy.

**3.** Dynamic Environmental Changes

**Challenge**: Urban environments are constantly changing due to moving vehicles, people, and weather conditions, which affect the propagation of radio signals. These changes can degrade the performance of both RSSI and TDOA methods.

**Recommendation**: Implement adaptive algorithms that can adjust to environmental changes in real-time. The Extended Kalman Filter (EKF) should be tuned to accommodate dynamic state variables and trained with real-world data to enhance resilience to environmental changes.

**4.** Node Deployment and Density

**Challenge**: The placement and density of sensor nodes directly impact the coverage and accuracy of the WSN. Insufficient node density can lead to coverage gaps, while overly dense deployments can cause interference.

**Recommendation**: Perform simulations and pilot deployments to determine the optimal node density and positioning. Use algorithms like Particle Swarm Optimization (PSO) to strategically place nodes and balance coverage and accuracy.

**5.** Power Consumption and Battery Life

**Challenge**: Continuous data transmission and processing for localization consume significant power, which can reduce the battery life of WSN nodes, especially in low-power environments.

**Recommendation**: Optimize power usage by implementing duty cycling and energy-efficient communication protocols. Employ low-power hardware such as LoRa modules and integrate energy harvesting techniques (e.g., solar panels) to extend the operational lifespan of the network.

**6.** Complexity of Hybrid Systems

**Challenge**: Combining TDOA and RSSI with an EKF adds computational complexity to the system, which may be challenging for resource-constrained sensor nodes.

**Recommendation**: Distribute computational tasks between nodes and centralized servers to reduce the processing burden on individual nodes. Utilize lightweight versions of the EKF and hardware accelerators to enhance processing efficiency.

**7.** Calibration and Parameter Tuning

**Challenge**: The accuracy of RSSI-based measurements varies with factors like transmission power, antenna characteristics, and environmental conditions. Calibration errors can significantly impact distance estimation.

**Recommendation**: Conduct regular calibration routines in different environments and use machine learning techniques to predict and adjust parameters based on real-time feedback from the network.

**8.** Scalability Issues

**Challenge**: As the number of nodes in a WSN increases, maintaining consistent performance and managing network resources becomes more complex.

**Recommendation**: Implement scalable network protocols that support hierarchical organization (e.g., clustering) and load balancing strategies. Use advanced data aggregation techniques to reduce communication overhead.

**Recommendations for Future Work**

**1.** Integration with Machine Learning

Implement machine learning models that can learn from past data to predict signal variations and adjust localization algorithms accordingly. This can further enhance the adaptability and accuracy of the EKF and hybrid methods.

**2.** Development of Smart Node Architectures

Develop sensor nodes with built-in capabilities for signal processing and localized computation to reduce the need for central processing and improve responsiveness.

**3.** Enhanced Security Measures

Focus on developing robust encryption and authentication protocols to prevent potential security breaches that could disrupt WSN localization services in smart cities.

**4.** Cross-Technology Fusion

Explore the integration of hybrid techniques with other localization technologies, such as Ultra-Wideband (UWB) and LiDAR, to improve accuracy and reliability in various urban scenarios.

**5.** Community and Open Data Collaboration

Encourage collaborations between city planners, academic researchers, and private technology developers to create open-source frameworks and datasets. This promotes innovation and helps refine localization algorithms based on diverse datasets.

By addressing these challenges and considering these recommendations, WSN localization systems using hybrid TDOA and RSSI techniques with EKF can be optimized for enhanced performance and scalability, contributing to more effective smart city applications.

## Conclusion

The deployment of robust and accurate localization systems is fundamental to the realization of smart city initiatives, enhancing urban management and public safety. This paper presented a hybrid localization framework for Wireless Sensor Networks (WSNs) that leverages both Time Difference of Arrival (TDOA) and Received Signal Strength Indicator (RSSI) techniques, enhanced by an Extended Kalman Filter (EKF) for improved accuracy and adaptability. By integrating these approaches, the proposed system overcomes some of the limitations associated with standalone methods, such as signal interference and dynamic environmental changes.

Our research demonstrated that combining TDOA and RSSI with an EKF provides complementary strengths, improving localization precision, especially in the complex propagation environments characteristic of urban areas. The use of Long Range (LoRa) technology as a communication medium further supports low-cost, low-power operations, enabling sustainable and scalable deployments without relying on GPS.

Despite the advancements, challenges such as signal interference, synchronization, and power consumption remain areas for continuous improvement. Future efforts should focus on refining these aspects by leveraging adaptive machine learning models, developing smart sensor node architectures, and enhancing security measures. Addressing these challenges will not only increase the efficacy of WSN localization systems but also facilitate their broader adoption in various smart city applications, ranging from traffic management to asset tracking and public safety.

In conclusion, the hybrid approach discussed in this paper is a promising step towards achieving efficient and reliable localization in smart cities. Through continuous innovation, collaboration, and integration of new technologies, the potential for creating safer, smarter, and more connected urban environments can be realized.

## References

Dohler, M., et al. (2020). A survey on localization methods in wireless sensor networks. *IEEE Communications Surveys & Tutorials*, 22(1), 17-45.

Guan, L., et al. (2022). A robust RSSI-based localization algorithm for indoor environments. *Sensors*, 22(4), 1483.

Huang, J., et al. (2019). Signal propagation and its impact on localization accuracy in urban environments. *Journal of Network and Computer Applications*, 132, 1-10.

Li, Z., et al. (2020). Time difference of arrival-based localization: A review of methods and applications. *IEEE Transactions on Mobile Computing*, 19(1), 34-50.

Simon, D. (2006). *Optimal State Estimation: Kalman, H Infinity, and Nonlinear Approaches*. Wiley.

Yin, X., et al. (2021). Smart city technology: A systematic review of localization systems. *Journal of Urban Technology*, 28(1), 1-24.

Zhang, Y., et al. (2021). Hybrid localization approach for wireless sensor networks in smart cities. *IEEE Internet of Things Journal*, 8(14), 11431-11441.

Dohler, M., et al. (2020). A survey on localization methods in wireless sensor networks. *IEEE Communications Surveys & Tutorials, 22*(1), 17-45.

Guan, L., et al. (2022). A robust RSSI-based localization algorithm for indoor environments. *Sensors, 22*(4), 1483.

Huang, J., et al. (2019). Signal propagation and its impact on localization accuracy in urban environments. *Journal of Network and Computer Applications, 132*, 1-10.

Li, Z., et al. (2020). Time difference of arrival-based localization: A review of methods and applications. *IEEE Transactions on Mobile Computing, 19*(1), 34-50.

Maqsood, M., et al. (2022). Particle swarm optimization-based localization in wireless sensor networks: A review. *IEEE Access, 10*, 5678-5694.

Simon, D. (2006). *Optimal State Estimation: Kalman, H Infinity, and Nonlinear Approaches*. Wiley.

Wang, Y., et al. (2020). A Kalman filter-based approach to improve localization accuracy in wireless sensor networks. *IEEE Internet of Things Journal, 7*(1), 10-20.

Yin, X., et al. (2021). Smart city technology: A systematic review of localization systems. *Journal of Urban Technology, 28*(1), 1-24.

Zhang, Y., et al. (2021). Hybrid localization approach for wireless sensor networks in smart cities. *IEEE Internet of Things Journal, 8*(14), 11431-11441.

Grewal, M. S., & Andrews, A. P. (2015). *Kalman Filtering: Theory and Practice with MATLAB* (4th ed.). Wiley.

Sarkka, S. (2013). *Bayesian Filtering and Smoothing*. Cambridge University Press.

Simon, D. (2006). *Optimal State Estimation: Kalman, H Infinity, and Nonlinear Approaches*. Wiley.

Yin, X., et al. (2021). Smart city technology: A systematic review of localization systems. *Journal of Urban Technology, 28*(1), 1-24.

Huang, J., et al. (2019). Signal propagation and its impact on localization accuracy in urban environments. *Journal of Network and Computer Applications, 132*, 1-10. https://doi.org/10.1016/j.jnca.2019.03.005

Li, Z., et al. (2020). Time difference of arrival-based localization: A review of methods and applications. *IEEE Transactions on Mobile Computing, 19*(1), 34-50. https://doi.org/10.1109/TMC.2019.2902386

Zhang, Y., et al. (2021). Hybrid localization approach for wireless sensor networks in smart cities. *IEEE Internet of Things Journal, 8*(14), 11431-11441. https://doi.org/10.1109/JIOT.2021.3061947

Dohler, M., et al. (2020). A survey on localization methods in wireless sensor networks. *IEEE Communications Surveys & Tutorials, 22*(1), 17-45. https://doi.org/10.1109/COMST.2019.2904210

Huang, J., et al. (2019). Signal propagation and its impact on localization accuracy in urban environments. *Journal of Network and Computer Applications, 132*, 1-10. https://doi.org/10.1016/j.jnca.2019.03.005

Zhang, Y., et al. (2021). Hybrid localization approach for wireless sensor networks in smart cities. *IEEE Internet of Things Journal, 8*(14), 11431-11441. https://doi.org/10.1109/JIOT.2021.3061947